


产品尺寸:


型号:01.FFA.1GY.405.CL52M.13

定位键 芯数


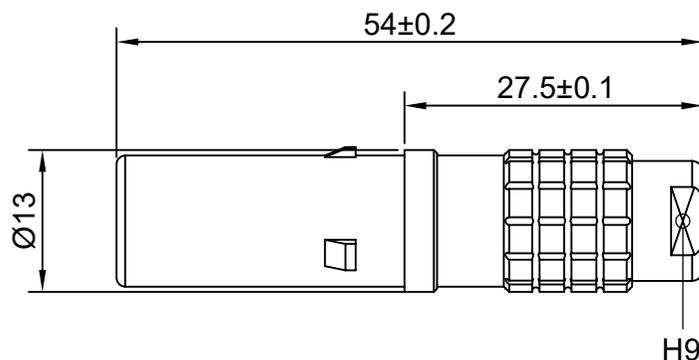


型号:ERA.1GY.405.CA.13


定位键 芯数

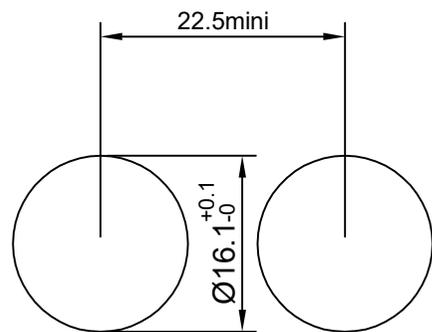


面板开口尺寸

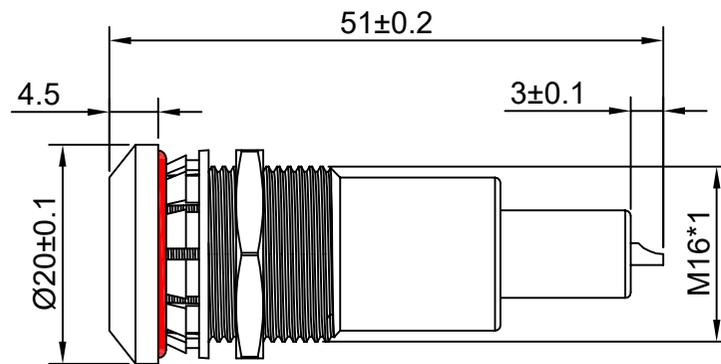

焊接端视图:



母针芯焊接端
焊接排序图



公针芯焊接端
焊接排序图

- 外壳材料:铜合金珍珠铬
- 绝缘材料:PEEK
- 针芯材料:铜合金镀金
- 插拔次数:> 1000次
- 防护等级:(插合时)IP50
- 工作温度:-40°C~+150°C
- 震 动:10~2000HZ,15g
- 冲 击:100g, 6ms
- 耐 电 压:16KV(AC)
- 绝缘电阻:> 5000MΩ
- 接触电阻:6MΩ
- 额定电流:11A
- 针芯数量:1Pin
- 针芯规格:Ø1.3
- 适配线径:Ø3.0-Ø5.0