


**产品尺寸:**


型号: 02.FGG.00B.005.CA40M

定位键 芯数 线夹

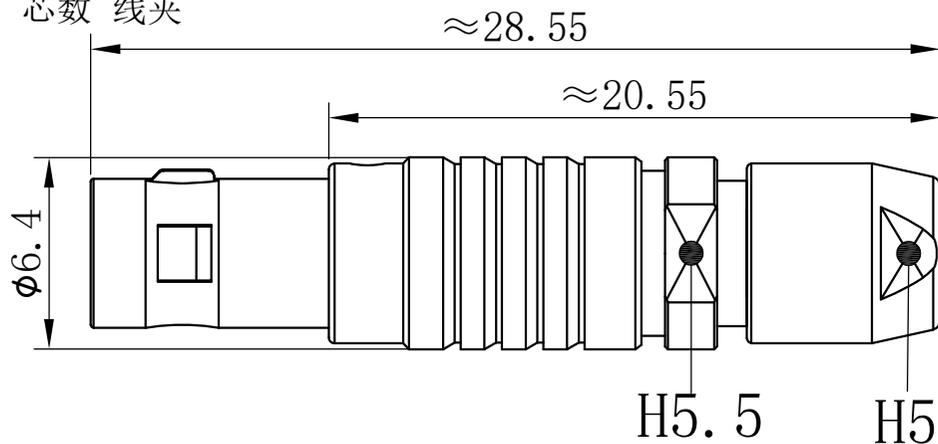


型号: EGG.00B.005.CL


定位键 芯数  
12.5mini

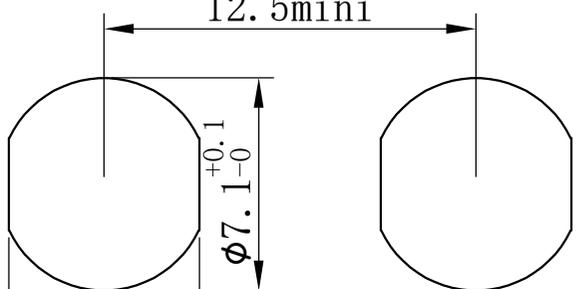


面板开口尺寸

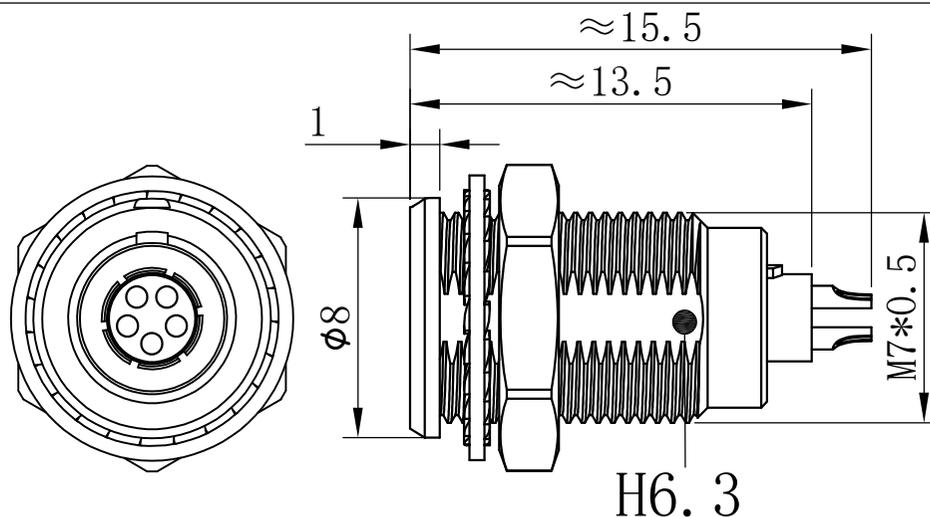

**焊接端视图:**



公针芯焊接端  
焊接排序图



母针芯焊接端  
焊接排序图

- 外壳材料: 铜合金镀珍珠铬
- 绝缘材料: PPS
- 针芯材料: 铜合金镀金
- 插拔次数: > 5000次
- 防护等级: (插合时) IP50
- 工作温度:  $-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$
- 震动:  $10 \sim 2000\text{HZ}$ , 15g
- 冲击: 100g, 6ms
- 耐盐雾: 144h
- 绝缘电阻:  $> 5000\text{M}\Omega$
- 接触电阻:  $12\text{m}\Omega$
- 额定电流: 1A
- 针芯数量: 5Pin
- 针芯规格:  $\phi 0.35$
- 插头适配线径: 2.0-4.0