
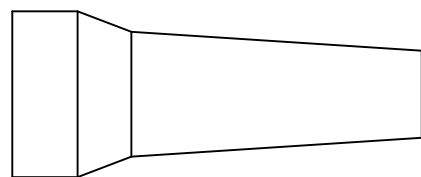


产品尺寸:


型号: 02. FGG. 0B. 009. CA52ZN

定位键 芯数 线夹


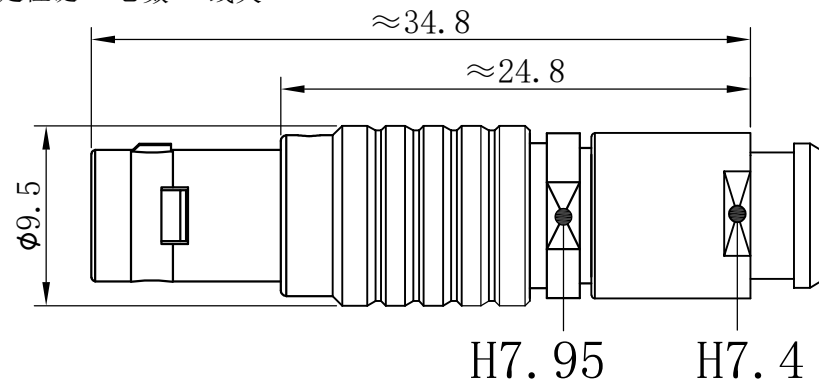


型号: EGG. 0B. 009. CL


定位键 芯数

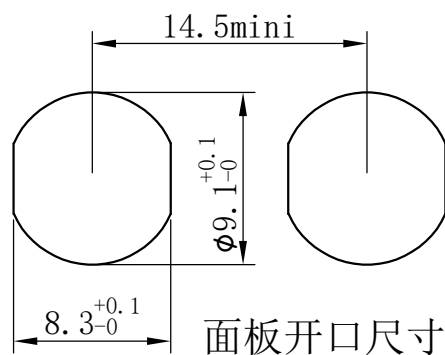


面板开口尺寸

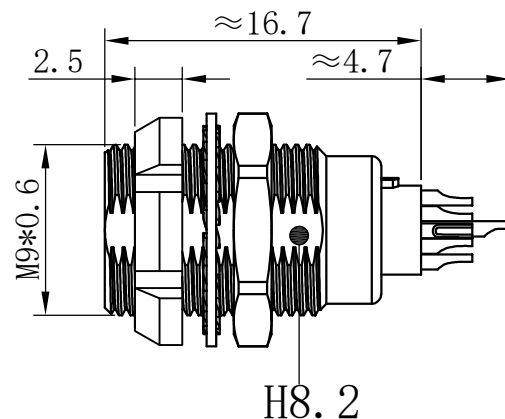

焊接端视图:



公针芯焊接端
焊接排序图

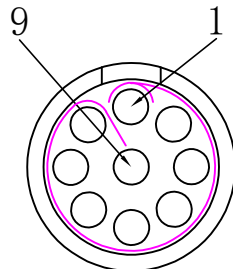

母针芯焊接端
焊接排序图

- 外壳材料: 铜合金镀珍珠铬
- 绝缘材料: PPS
- 护套: 黑色TPU
- 针芯材料: 铜合金镀金
- 插拔次数: >5000次
- 防护等级: (插合时) IP50
- 工作温度: -40℃~+150℃
- 相对湿度: 60℃时, 93±2%
- 震动: 10~2000HZ, 15g
- 冲击: 100g, 6ms
- 耐盐雾: 144h
- 绝缘电阻: >5000MΩ
- 接触电阻: 10mΩ
- 额定电流: 1.5A
- 针芯数量: 9Pin
- 针芯规格: Ø0.5
- 插头适配线径: 3.0-5.0