
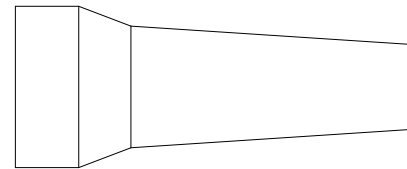


产品尺寸:


型号:02.FGG.2B.Q22.CA62ZN

定位键 芯数 线夹

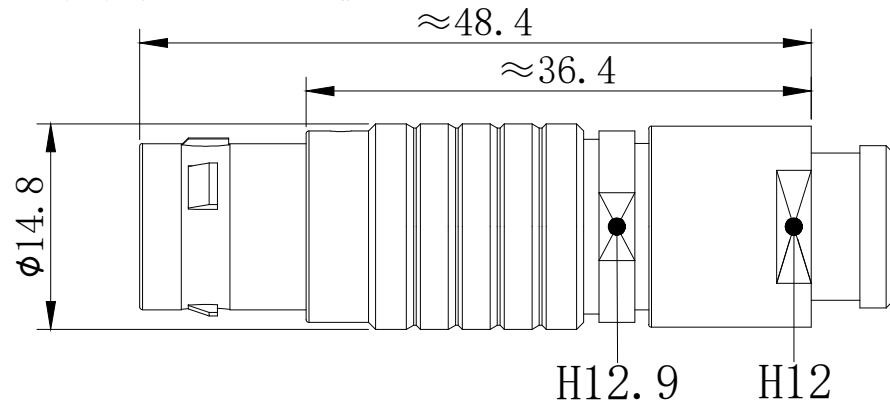


型号:EGG.2B.Q22.CL


定位键 芯数

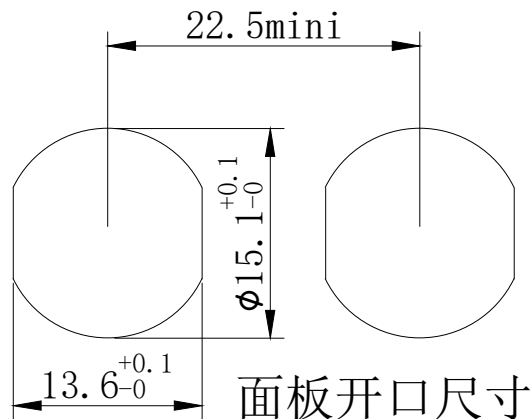


面板开口尺寸

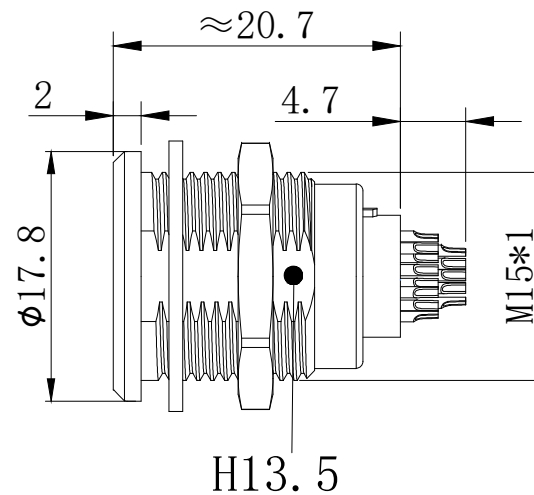

焊接端视图:



公针芯焊接端
焊接排序图



母针芯焊接端
焊接排序图

- 外壳材料:铜合金镀珍珠铬
- 绝缘材料:PPS
- 护套:黑色TPU
- 针芯材料:铜合金镀金
- 插拔次数: >5000 次
- 防护等级:(插合时)IP54
- 工作温度: $-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$
- 相对湿度: 60°C 时, $93 \pm 2\%$
- 震动: $10 \sim 2000\text{HZ}$, 15g
- 冲击: 100g , 6ms
- 耐盐雾: 144h
- 绝缘电阻: $>5000\text{M}\Omega$
- 接触电阻: $10.5\text{m}\Omega$
- 额定电流: 3.5A
- 针芯数量:22Pin
- 针芯规格: $\phi 0.5$
- 插头适配线径: $4.0 \sim 10.0$