


产品尺寸:



型号:02.FGG.3B.006.CA82M

定位键 芯数 线夹

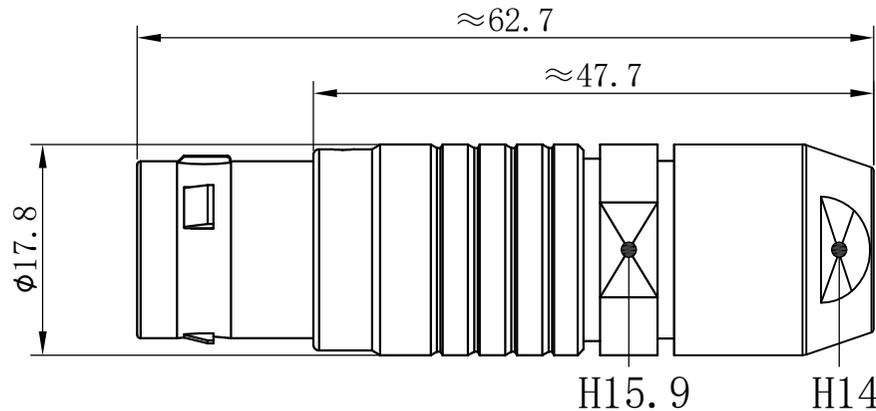


型号:EGG.3B.006.CL


定位键 芯数

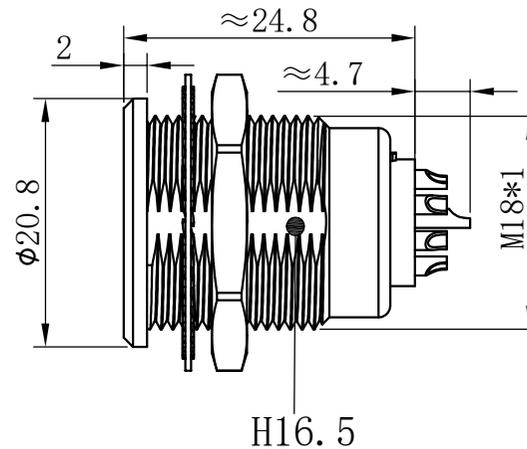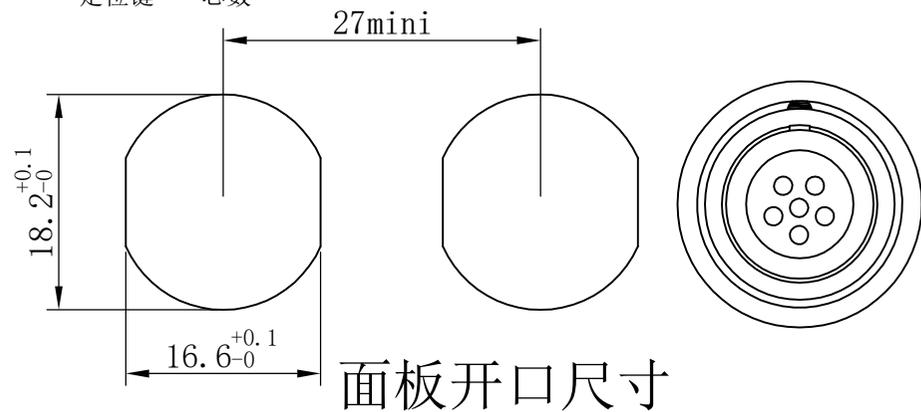

焊接端视图:



公针芯焊接端
焊接排序图



母针芯焊接端
焊接排序图

- 外壳材料:铜合金镀珍珠铬
- 绝缘材料:PPS
- 针芯材料:铜合金镀金
- 插拔次数:>5000次
- 防护等级:(插合时)IP50
- 工作温度:-40℃~+150℃
- 震 动:10~2000HZ, 15g
- 冲 击:100g, 6ms
- 耐 盐 雾:144h
- 绝缘电阻:>5000M Ω
- 接触电阻:5m Ω
- 额定电流:16A
- 针芯数量:6Pin
- 针芯规格: $\phi 1.6$
- 适配线径:6.0-12.0