



产品尺寸:



型号:H. 02. FGG. 4B. 4D620. CA156M. 20

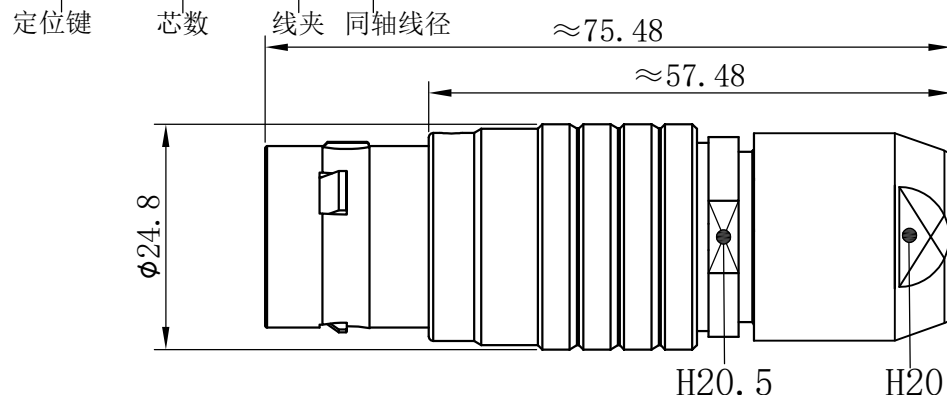

型号:H. EGG. 4B. 4D620. CL. 20

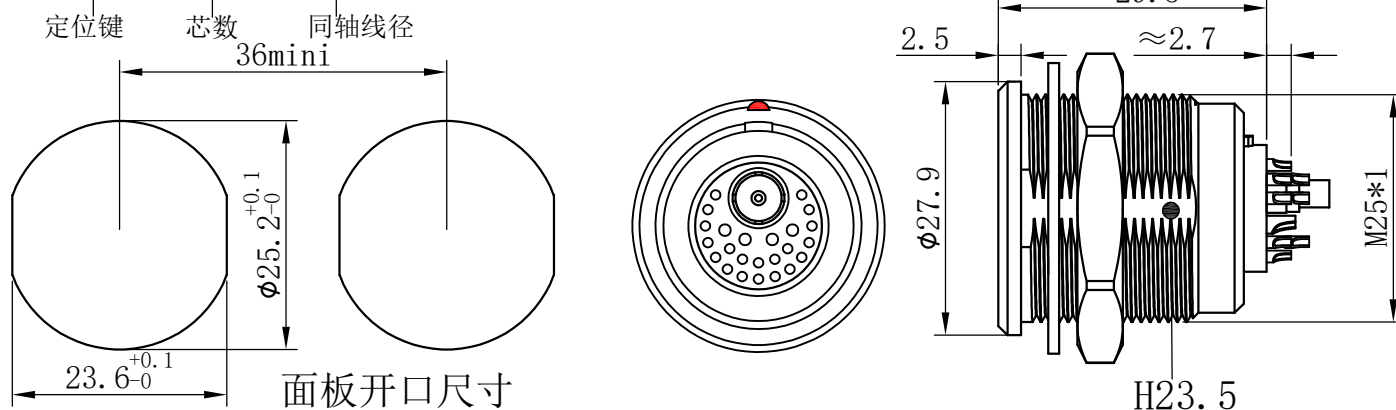

焊接端视图:



- 外壳材料:铜合金镀珍珠铬
- 绝缘材料:PPS
- 插孔材料:铜合金镀金
- 插拔次数:>5000次
- 防护等级:(插合时) IP50
- 工作温度:-40℃~+150℃
- 相对湿度:60℃时, 93±2%
- 震动:10~2000HZ, 15g
- 冲击:100g, 6ms
- 耐盐雾:144h
- 绝缘电阻:>5000MΩ
- 接触电阻:8mΩ
- 小针电流:4A
- 小针数量:20Pin
- 小针规格:φ0.7
- 大针数量:4Pin
- 大针规格:φ0.9
- 大针电流:6A
- 同轴芯数:1Pin
- 同轴阻抗:50Ω
- 插头适配线径:12.0-15.5