


产品尺寸:

型号: 02. FGG. 4B. 716. CA156M. 25


定位键 芯数 线夹 同轴线径

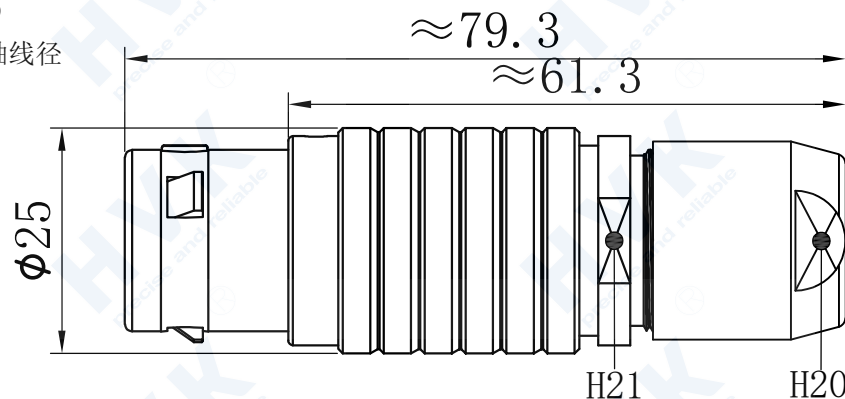



型号: EGG. 4B. 716. CL. 25

定位键 芯数 同轴线径


36mini

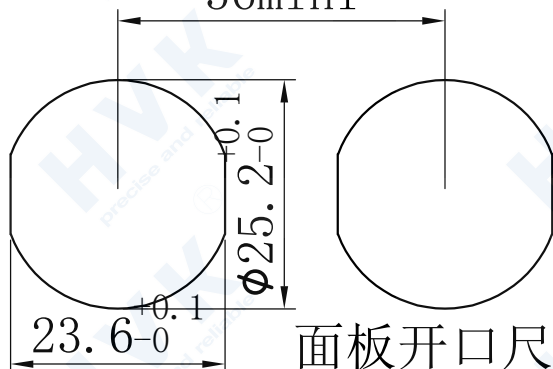


面板开口尺寸

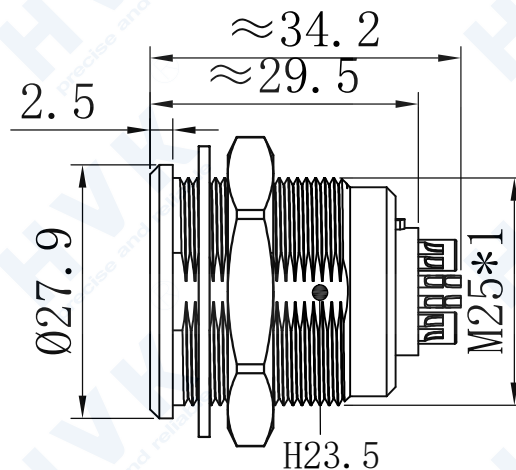

焊接端视图:



公针芯焊接端
焊接排序图



母针芯焊接端
焊接排序图

- 外壳材料: 铜合金镀珍珠铬
- 绝缘材料: PPS
- 针芯材料: 铜合金镀金
- 插拔次数: >5000次
- 防护等级: (插合时) IP50
- 工作温度: -40℃ ~ +150℃
- 震动: 10~2000HZ, 15g
- 冲击: 100g, 6ms
- 耐盐雾: 144h
- 绝缘电阻: >5000MΩ
- 接触电阻: 6mΩ
- 额定电流: 7A
- 针芯数量: 16Pin
- 针芯规格: Ø0.9
- 同轴芯数: 2Pin
- 同轴针芯规格: Ø0.5
- 同轴阻抗: 50Ω
- 插头适配线径: 12-15.5