



产品尺寸:

型号:02.FGG.2B.106.CA10.0ZN




定位销 芯数 线夹 ≈ 48.4

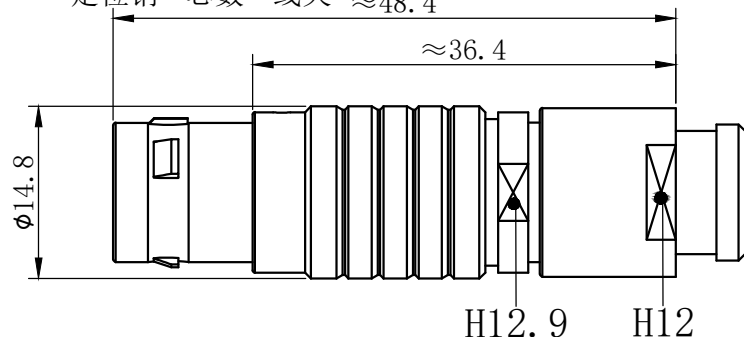


- 外壳材料:铜合金镀珍珠铬
- 绝缘材料:PPS
- 护 套:黑色TPU
- 针芯材料:铜合金镀金
- 插拔次数: >5000 次
- 防护等级:(插合时)IP50
- 工作温度: $-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$
- 相对湿度: 60°C 时, $93 \pm 2\%$
- 震 动: $10 \sim 2000\text{HZ}$, 15g
- 冲 击:100g, 6ms
- 耐 盐 雾:144h
- 绝缘电阻: $>5000\text{M}\Omega$
- 接触电阻: $8\text{m}\Omega$
- 额定电流:6A
- 耐电压:1000V
- 针芯数量:6Pin
- 针芯规格: $\phi 0.7$
- 气嘴芯数:1Pin
- 最大工作压强:6bar
- 插头适配线径:4.0-10.0

型号:EKG.2B.106.CL


定位销 芯数

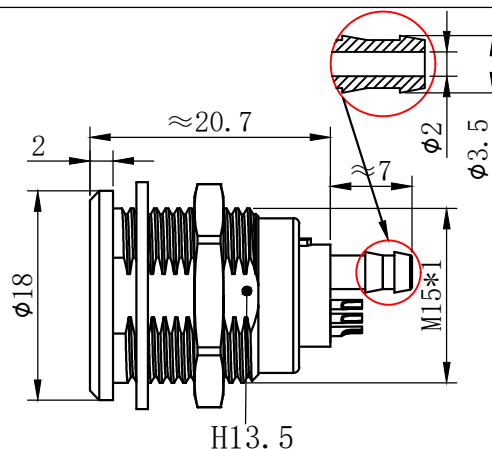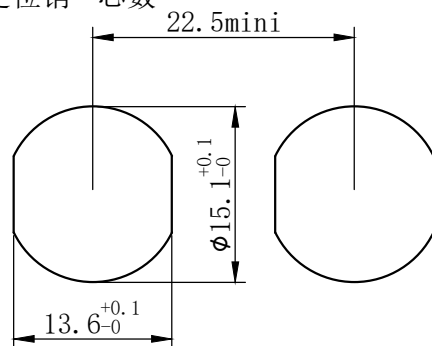

焊接端视图:



公针芯焊接端
焊接排序图



母针芯焊接端
焊接排序图