
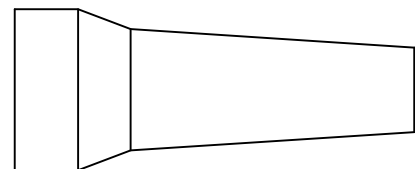
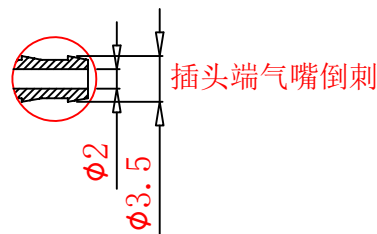


产品尺寸:


型号:02.FGG.2B.108.CA92ZG

定位键 芯数 线夹


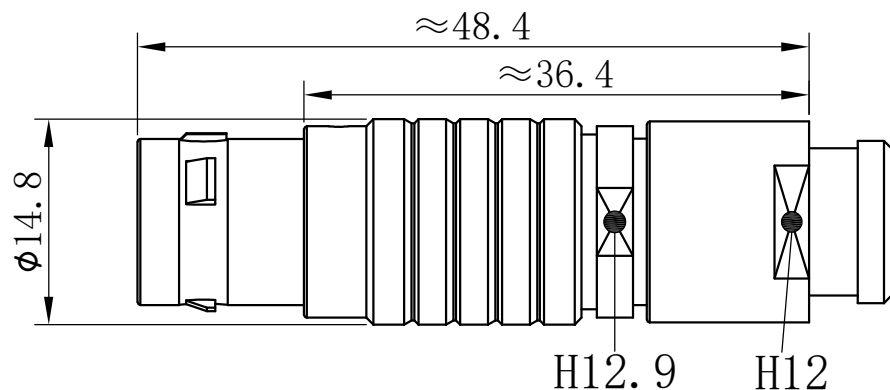


型号:ENG.2B.108.CL



定位键 芯数

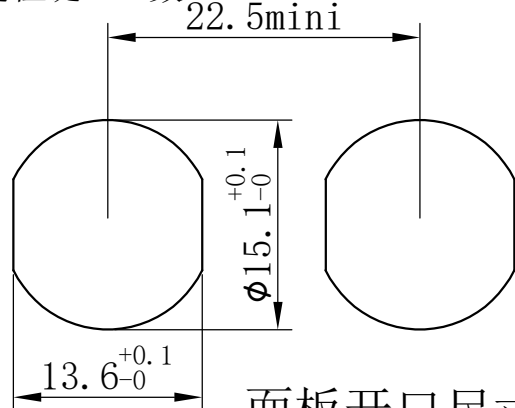

面板开口尺寸

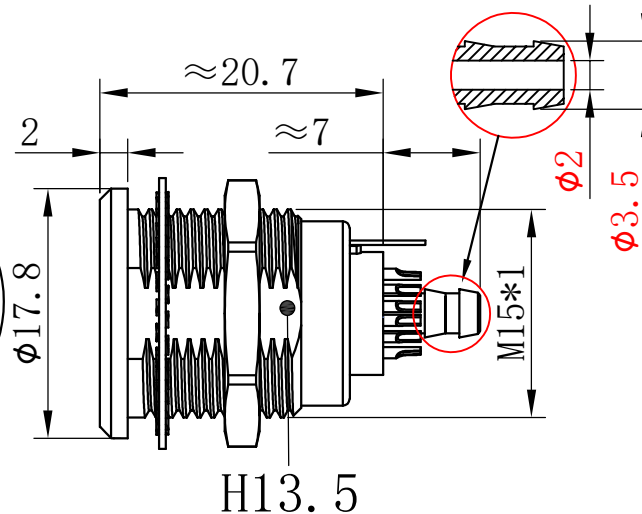

焊接端视图:



- 外壳材料:铜合金镀珍珠铬
- 绝缘材料:PPS
- 护套:灰色TPU
- 针芯材料:铜合金镀金
- 插拔次数:>5000次
- 防护等级:(插入时) IP50
- 工作温度:-40℃~+150℃
- 相对湿度:60℃时, 93±2%
- 震动:10~2000HZ, 15g
- 冲击:100g, 6ms
- 耐盐雾:144h
- 绝缘电阻:>5000MΩ
- 接触电阻:8mΩ
- 额定电流:6A
- 针芯数量:8Pin
- 针芯规格:Ø0.7
- 气嘴芯数:1Pin
- 最大工作压强:6bar
- 插头适配线径:4.0-10.0